


| Model    | A   | B   | C  | D  | ØE  |
|----------|-----|-----|----|----|-----|
| RC 14.25 | 256 | 256 | 29 | 91 | 147 |



| Drilling scheme | A   | B   | C   | D  | ØE  |
|-----------------|-----|-----|-----|----|-----|
| RC 14.25        | 232 | 116 | 220 | 15 | 3,5 |

## RC 14.25 - 250×250 | 250 m<sup>3</sup>/h

### VENTILATION



- Axial fans supplied with grille and filter;
- High external profile;
- IP44 or IP54 protection degree;
- Quick and functional assembly of the fan on the electrical cabinet through elastic click hooks and gasket pre-installed on the product;
- Slotted external grilles to allow drainage of condensation;
- Maximum operating temperature: +50°C;

- Possible installation with screws (provided);
- Electrical connection through terminal block;
- Ball bearing motor;
- Body made of ABS self-extinguishing material grey RAL 7035;
- Grilles in grey RAL 7032 and 7035, black RAL 9005;
- Easily removable grille to allow quick replacement of the filter;
- In accordance with European Standard EN 60529,

### TECHNICAL DATA

| Model intake | Code    | IP Grade | Voltage (V) | Frequency (Hz) | Colour grille  | Flow rate (m <sup>3</sup> /h) with filter | Flow rate (m <sup>3</sup> /h) without filter | Power (W) | Nom. Curr. (A) | Noisiness dB(A) <sub>5m</sub> | Weight Kg |
|--------------|---------|----------|-------------|----------------|----------------|---|--|-----------|----------------|-------------------------------|-----------|
| RC 14.25     | 0090332 | IP44     | 220-240     | 50/60          | GREY RAL 7032  | 150                                       | 250  | 30        | 0,22           | 40                            | 1,2       |
| RC 14.25     | 0090335 | IP44     | 220-240     | 50/60          | GREY RAL 7035  | 150                                       | 250  | 30        | 0,22           | 40                            | 1,2       |
| RC 14.25     | 0090305 | IP44     | 220-240     | 50/60          | BLACK RAL 9005 | 150                                       | 250  | 30        | 0,22           | 40                            | 1,2       |
| RC 14.25     | 0090232 | IP44     | 110-120     | 50/60          | GREY RAL 7032  | 150                                       | 250  | 30        | 0,44           | 40                            | 1,2       |
| RC 14.25     | 0090235 | IP44     | 110-120     | 50/60          | GREY RAL 7035  | 150                                       | 250  | 30        | 0,44           | 40                            | 1,2       |
| RC 14.25     | 0090205 | IP44     | 110-120     | 50/60          | BLACK RAL 9005 | 150                                       | 250  | 30        | 0,44           | 40                            | 1,2       |
| RC 14.25     | 0090632 | IP54     | 220-240     | 50/60          | GREY RAL 7032  | 130                                       | 250  | 30        | 0,22           | 40                            | 1,2       |
| RC 14.25     | 0090635 | IP54     | 220-240     | 50/60          | GREY RAL 7035  | 130                                       | 250  | 30        | 0,22           | 40                            | 1,2       |
| RC 14.25     | 0090605 | IP54     | 220-240     | 50/60          | BLACK RAL 9005 | 130                                       | 250  | 30        | 0,22           | 40                            | 1,2       |
| RC 14.25     | 0090432 | IP54     | 110-120     | 50/60          | GREY RAL 7032  | 130                                       | 250  | 30        | 0,44           | 40                            | 1,2       |
| RC 14.25     | 0090435 | IP54     | 110-120     | 50/60          | GREY RAL 7035  | 130                                       | 250  | 30        | 0,44           | 40                            | 1,2       |
| RC 14.25     | 0090405 | IP54     | 110-120     | 50/60          | BLACK RAL 9005 | 130                                       | 250  | 30        | 0,44           | 40                            | 1,2       |

### FLOW CHARTS

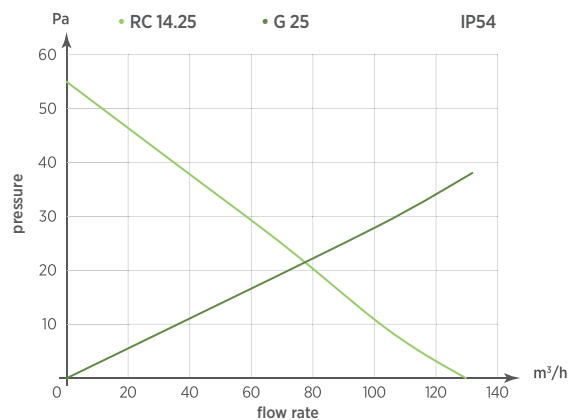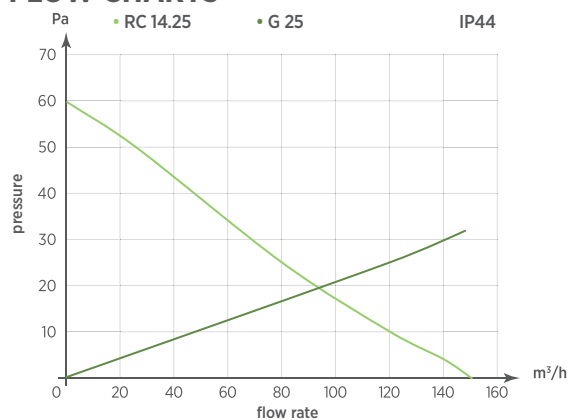

### ACCESSORIES: SEE PAGES 22 AND 44



Grilles



Thermostats



Hygromat