


Model	A	B	C	D	ØE
RC 20.32 S	318,5	318,5	5,5	160	204



Drilling scheme	A	B	ØC
RC 20.32 S	291×291	302×302	4,5

RC 20.32 S - 320×320 | 520 m³/h



VENTILATION

- Axial fans supplied with grille and filter;
- Low external profile;
- IP44 or IP54 protection degree;
- Quick and functional assembly of the fan on the electrical cabinet through elastic click hooks and gasket pre-installed on the product;
- Maximum operating temperature: +50°C;
- Possible installation with screws (not provided);
- Slotted external grilles to allow drainage of condensation;
- Electrical connection through terminal block;
- Ball bearing motor;
- Body made of ABS self-extinguishing material grey RAL 7035;
- Grilles in grey RAL 7032 and 7035, black RAL 9005;
- Easily removable grille to allow quick replacement of the filter;
- In accordance with European Standard EN 60529, EN 60335-2-80.

TECHNICAL DATA

Model intake	Code	Model extraction	Code	IP Grade	Voltage (V)	Frequency (Hz)	Colour grille	Flow rate (m ³ /h) with filter	Flow rate (m ³ /h) without filter	Power (W)	Nom. Curr. (A)	Noisiness dB(A) _{5m}	Weight Kg
RC 20.32 S	0093432	-	-	IP44	220-240	50/60	GREY RAL 7032	450	520	35	0,15	55	2,6
RC 20.32 S	0093435	RC 20.32 S E	0103135	IP44	220-240	50/60	GREY RAL 7035	450	520	35	0,15	55	2,6
RC 20.32 S	0093405	-	-	IP44	220-240	50/60	BLACK RAL 9005	450	520	35	0,15	55	2,6
RC 20.32 S	0091132	-	-	IP44	110-120	50/60	GREY RAL 7032	450	520	35	0,3	55	2,6
RC 20.32 S	0091135	RC 20.32 S E	0103235	IP44	110-120	50/60	GREY RAL 7035	450	520	35	0,3	55	2,6
RC 20.32 S	0091105	-	-	IP44	110-120	50/60	BLACK RAL 9005	450	520	35	0,3	55	2,6
RC 20.32 S	0099732	-	-	IP54	220-240	50/60	GREY RAL 7032	400	520	35	0,15	55	2,6
RC 20.32 S	0099735	RC 20.32 S E	0103335	IP54	220-240	50/60	GREY RAL 7035	400	520	35	0,15	55	2,6
RC 20.32 S	0099705	-	-	IP54	220-240	50/60	BLACK RAL 9005	400	520	35	0,15	55	2,6
RC 20.32 S	0092232	-	-	IP54	110-120	50/60	GREY RAL 7032	400	520	35	0,3	55	2,6
RC 20.32 S	0092235	RC 20.32 S E	0103435	IP54	110-120	50/60	GREY RAL 7035	400	520	35	0,3	55	2,6
RC 20.32 S	0092205	-	-	IP54	110-120	50/60	BLACK RAL 9005	400	520	35	0,3	55	2,6

FLOW CHARTS

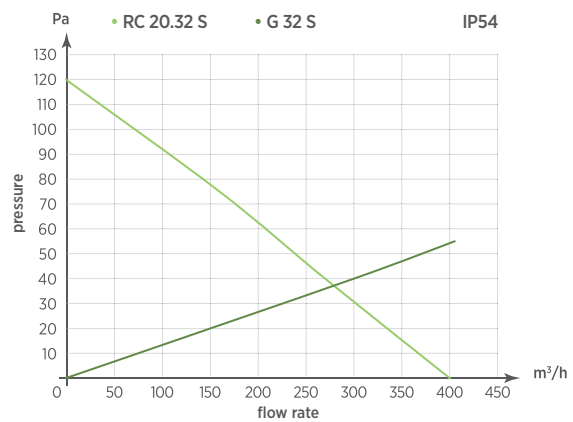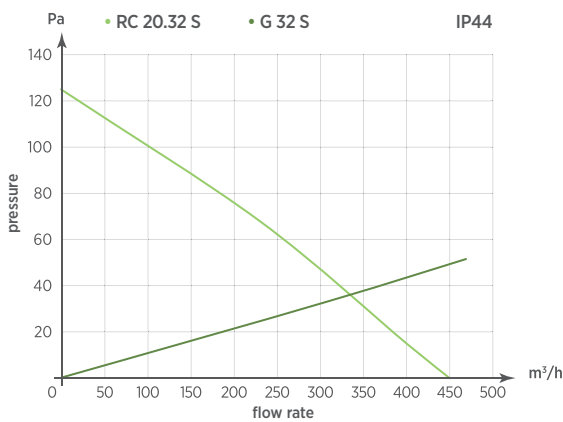

ACCESSORIES:
SEE PAGES 22 AND 44



Grilles



Thermostats



Hygostat