


Model	A	B	C	D	ØE
RC 20.32	323	322	34	140	204



Drilling scheme	A	B	C	D	E	ØF	(r) G
RC 20.32	302	297	287	281	100	3,5	12,5

## RC 20.32 - 320×320 | 520 m<sup>3</sup>/h



### VENTILATION

- Axial fans supplied with grille and filter;
- High external profile;
- IP44 or IP54 protection degree;
- Quick and functional assembly of the fan on the electrical cabinet through elastic click hooks and gasket pre-installed on the product;
- Maximum operating temperature: +50°C;
- Possible installation with screws (provided);
- Slotted external grilles to allow drainage of condensation;
- Electrical connection through terminal block;
- Ball bearing motor;
- Body made of ABS self-extinguishing material grey RAL 7035;
- Grilles in grey RAL 7032 and 7035, black RAL 9005;
- Easily removable grille to allow quick replacement of the filter;
- In accordance with European Standard EN 60529, EN 60335-2-80.

### TECHNICAL DATA

Model intake	Code	IP Grade	Voltage (V)	Frequency (Hz)	Colour grille	Flow rate (m <sup>3</sup> /h) with filter	Flow rate (m <sup>3</sup> /h) without filter	Power (W)	Nom. Curr. (A)	Noisiness dB(A) <sub>3m</sub>	Weight (Kg)
RC 20.32	0095732	IP44	220-240	50/60 Hz	GREY RAL 7032	450	520	35	0,15	55	2,6
RC 20.32	0095735	IP44	220-240	50/60 Hz	BLACK RAL 7035	450	520	35	0,15	55	2,6
RC 20.32	0095705	IP44	220-240	50/60 Hz	BLACK RAL 9005	450	520	35	0,15	55	2,6
RC 20.32	0096132	IP44	110-120	50/60 Hz	GREY RAL 7032	450	520	35	0,3	55	2,6
RC 20.32	0096135	IP44	110-120	50/60 Hz	BLACK RAL 7035	450	520	35	0,3	55	2,6
RC 20.32	0096105	IP44	110-120	50/60 Hz	BLACK RAL 9005	450	520	35	0,3	55	2,6
RC 20.32	0089632	IP54	220-240	50/60 Hz	GREY RAL 7032	400	520	35	0,15	55	2,6
RC 20.32	0089635	IP54	220-240	50/60 Hz	BLACK RAL 7035	400	520	35	0,15	55	2,6
RC 20.32	0089605	IP54	220-240	50/60 Hz	BLACK RAL 9005	400	520	35	0,15	55	2,6
RC 20.32	0089532	IP54	110-120	50/60 Hz	GREY RAL 7032	400	520	35	0,3	55	2,6
RC 20.32	0089535	IP54	110-120	50/60 Hz	BLACK RAL 7035	400	520	35	0,3	55	2,6
RC 20.32	0089505	IP54	110-120	50/60 Hz	BLACK RAL 9005	400	520	35	0,3	55	2,6

### FLOW CHARTS

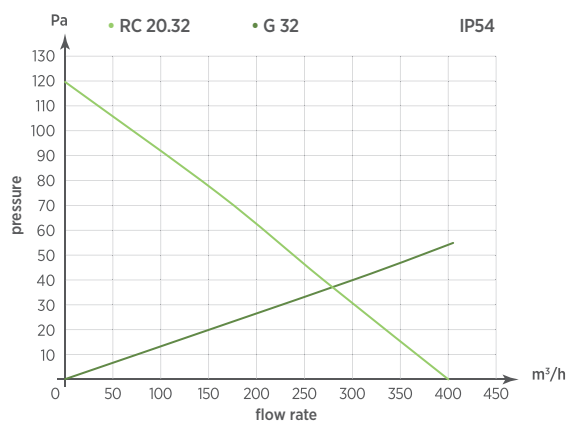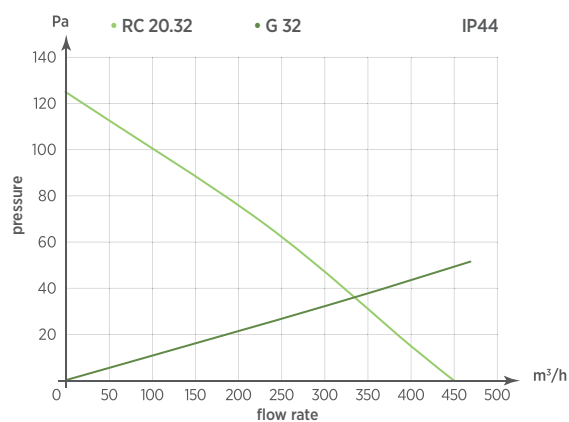

### ACCESSORIES:

SEE PAGES 22 AND 44



Grilles



Thermostats



Hygrostat