


Model	A	B	C	D	ØE
RCQ 160.25	250	250	5,5	105	120



Drilling scheme	A	B	C
RCQ 160.25	223x223	230=234x230+234	4,5

## RCQ 160.25 - 250x250 | 145 m<sup>3</sup>/h

### VENTILATION


- Axial fans supplied with grille and filter;
- Low external profile;
- IP54 protection degree (IP44 on request);
- Maximum operating temperature: +70°C;
- Quick and functional assembly of the fan on the electrical cabinet through elastic click hooks and gasket pre-installed on the product;
- Possible installation with screws (not provided);

- Body and Grille made of ABS self-extinguishing material grey RAL 7035;
- Ball bearing motor;
- Slotted external grilles to allow drainage of condensation;
- Easily removable grille to allow quick replacement of the filter;
- In accordance with European Standard EN 60529, EN 60335-2-80;
- UL version available.

### TECHNICAL DATA

Model intake	Code	Model extraction	Code	IP Grade	Voltage (V)	Frequency (Hz)	Colour grille	Flow rate (m <sup>3</sup> /h) with filter	Flow rate (m <sup>3</sup> /h) without filter	Power (W)	Nom. Curr. (A)	Noisiness dB(A) <sub>2m</sub>	Weight Kg
RCQ 160.25	0100735	RCQ 160.25 E	0102035	IP54	12	-	GREY RAL 7035	120	145	5	0,4	37	0,9
RCQ 160.25	0100835	RCQ 160.25 E	0102135	IP54	24	-	GREY RAL 7035	120	145	5	0,2	37	0,9
RCQ 160.25	0105735	RCQ 160.25 E	0106035	IP54	12	50/60	GREY RAL 7035	125	135	17	2	39	0,9
RCQ 160.25	0105835	RCQ 160.25 E	0106135	IP54	24	50/60	GREY RAL 7035	125	135	15	1	39	0,9
RCQ 160.25	0105935	RCQ 160.25 E	0106235	IP54	48	50/60	GREY RAL 7035	125	135	16	0,5	39	0,9
RCQ 160.25	0100635	RCQ 160.25 E	0102235	IP54	110-120	50/60	GREY RAL 7035	125	135	20	0,25	39	1,2
RCQ 160.25	0100535	RCQ 160.25 E	0102335	IP54	220-240	50/60	GREY RAL 7035	125	135	20	0,125	39	1,2
RCQ 160.25 UL	0200735	RCQ 160.25 E UL	0202035	IP54	12	-	GREY RAL 7035	120	145	5	0,4	37	0,9
RCQ 160.25 UL	0200835	RCQ 160.25 E UL	0202135	IP54	24	-	GREY RAL 7035	120	145	5	0,2	37	0,9
RCQ 160.25 UL	0205735	RCQ 160.25 E UL	0206035	IP54	12	50/60	GREY RAL 7035	125	135	17	2	39	0,9
RCQ 160.25 UL	0205835	RCQ 160.25 E UL	0206135	IP54	24	50/60	GREY RAL 7035	125	135	15	1	39	0,9
RCQ 160.25 UL	0205935	RCQ 160.25 E UL	0206235	IP54	48	50/60	GREY RAL 7035	125	135	16	0,5	39	0,9
RCQ 160.25 UL	0200635	RCQ 160.25 E UL	0202235	IP54	110-120	50/60	GREY RAL 7035	125	135	20	0,25	39	1,2
RCQ 160.25 UL	0200535	RCQ 160.25 E UL	0202335	IP54	220-240	50/60	GREY RAL 7035	125	135	20	0,125	39	1,2

### FLOW CHARTS

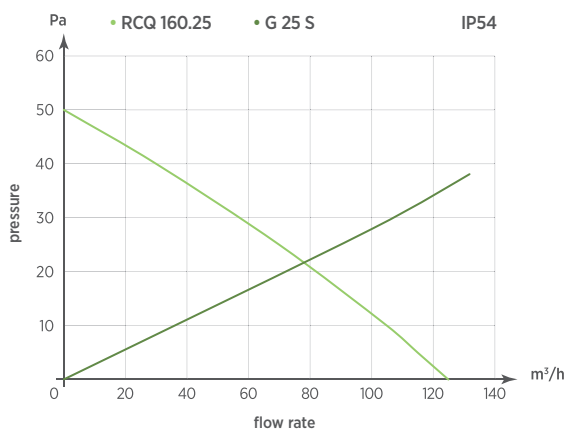

### ACCESSORIES: SEE PAGES 22 AND 44



Grilles



Thermostats



Hygostat