


Model	A	B	C	D	E
RCQ 50.11	110	110	4,5	61	80



Drilling scheme	A	B	Ø C
RCQ 50.11	92x92	95x95	2,6

RCQ 50.11 - 110×110 | 35 m³/h

VENTILATION


- Axial fans supplied with grille and filter;
- Low external profile;
- IP54 protection degree (IP44 on request);
- Maximum operating temperature: +70°C;
- Quick and functional assembly of the fan on the electrical cabinet through elastic click hooks and gasket pre-installed on the product;
- Possible installation with screws (not provided);

- Body and Grille made of ABS self-extinguishing material grey RAL 7035;
- Ball bearing motor;
- Easily removable grille to allow quick replacement of the filter;
- Slotted external grilles to allow drainage of condensation;
- In accordance with European Standard EN 60529, EN 60335-2-80;
- UL version available.

TECHNICAL DATA

Model intake	Code	Model extraction	Code	IP Grade	Voltage (V)	Frequency (Hz)	Colour grille	Flow rate (m ³ /h) with filter	Flow rate (m ³ /h) without filter	Power (W)	Nom. Curr. (A)	Noisiness dB(A) _{3m}	Weight Kg
RCQ 50.11	0104535	RCQ 50.11 E	0104935	IP54	12	-	GREY RAL 7035	25	35	3	0,15	30	0,2
RCQ 50.11	0104635	RCQ 50.11 E	0105035	IP54	24	-	GREY RAL 7035	25	35	3	0,08	30	0,2
RCQ 50.11	0104735	RCQ 50.11 E	0105135	IP54	110-120	50/60	GREY RAL 7035	25	35	9	0,12	32	0,4
RCQ 50.11	0104835	RCQ 50.11 E	0105235	IP54	220-240	50/60	GREY RAL 7035	25	35	9	0,06	32	0,4
RCQ 50.11 UL	0204535	RCQ 50.11 E UL	0204935	IP54	12	-	GREY RAL 7035	25	35	3	0,15	30	0,2
RCQ 50.11 UL	0204635	RCQ 50.11 E UL	0205035	IP54	24	-	GREY RAL 7035	25	35	3	0,08	30	0,2
RCQ 50.11 UL	0204735	RCQ 50.11 E UL	0205135	IP54	110-120	50/60	GREY RAL 7035	25	35	9	0,12	32	0,4
RCQ 50.11 UL	0204835	RCQ 50.11 E UL	0205235	IP54	220-240	50/60	GREY RAL 7035	25	35	9	0,06	32	0,4

FLOW CHARTS

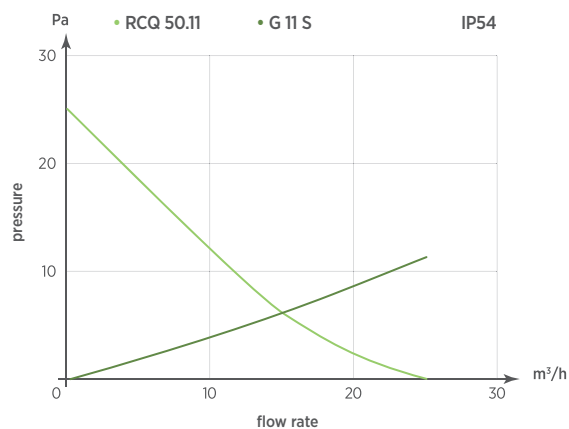

ACCESSORIES: SEE PAGES 22 AND 44



Grilles



Thermostats



Hygostat